

RUGGED 50-OHM
RF CONNECTORS



N Series



HN Series



TNC



BNC



SMA



SMB



SSMA



OSMM




OSP/OSSP



SMP/SMPM

Microminiature	SMPM (GPPO)
	OSMM
	SMP (GPO)
	SSMA Semi-Rigid
	SMK (2.92 mm)
Subminiature	SMA Semi-Rigid
	MIL-DTL-39012/ 79, 80, 81, 82, 83, 92
	SSMA Flexible
	SMA Flexible
	MIL-DTL-39012/55, 56, 57, 58, 59, 60, 61
Miniature	SMA Edge Mount
	MIL-DTL-83517
	QMA
	SMB
	TNC Dual Crimp
Standard	MIL-DTL-39012/26, 27, 29
	TNC Single Crimp
	MIL-T-81490
	BNC Dual Crimp
	MIL-DTL-39012/16, 17, 19
Blind Mate	BNC Single Crimp
	High-Frequency N Series
	N Dual Crimp
	MIL-DTL-39012/1, 2, 3, 5
	C
Blind Mate	HN (High-Voltage N)
	OSSP Semi-Rigid (BMMA)
	OSP Semi-Rigid (BMA)
	OSSP Flexible (BMMA)
	OSP Flexible (BMA)

C-C: Cable to cable connectivity
C-B: Cable to board connectivity
B-B: Board-to-board connectivity
Voltage is working voltage at sea level. Watts is typical average power handling at 1 GHz, sea level, and room temperature.

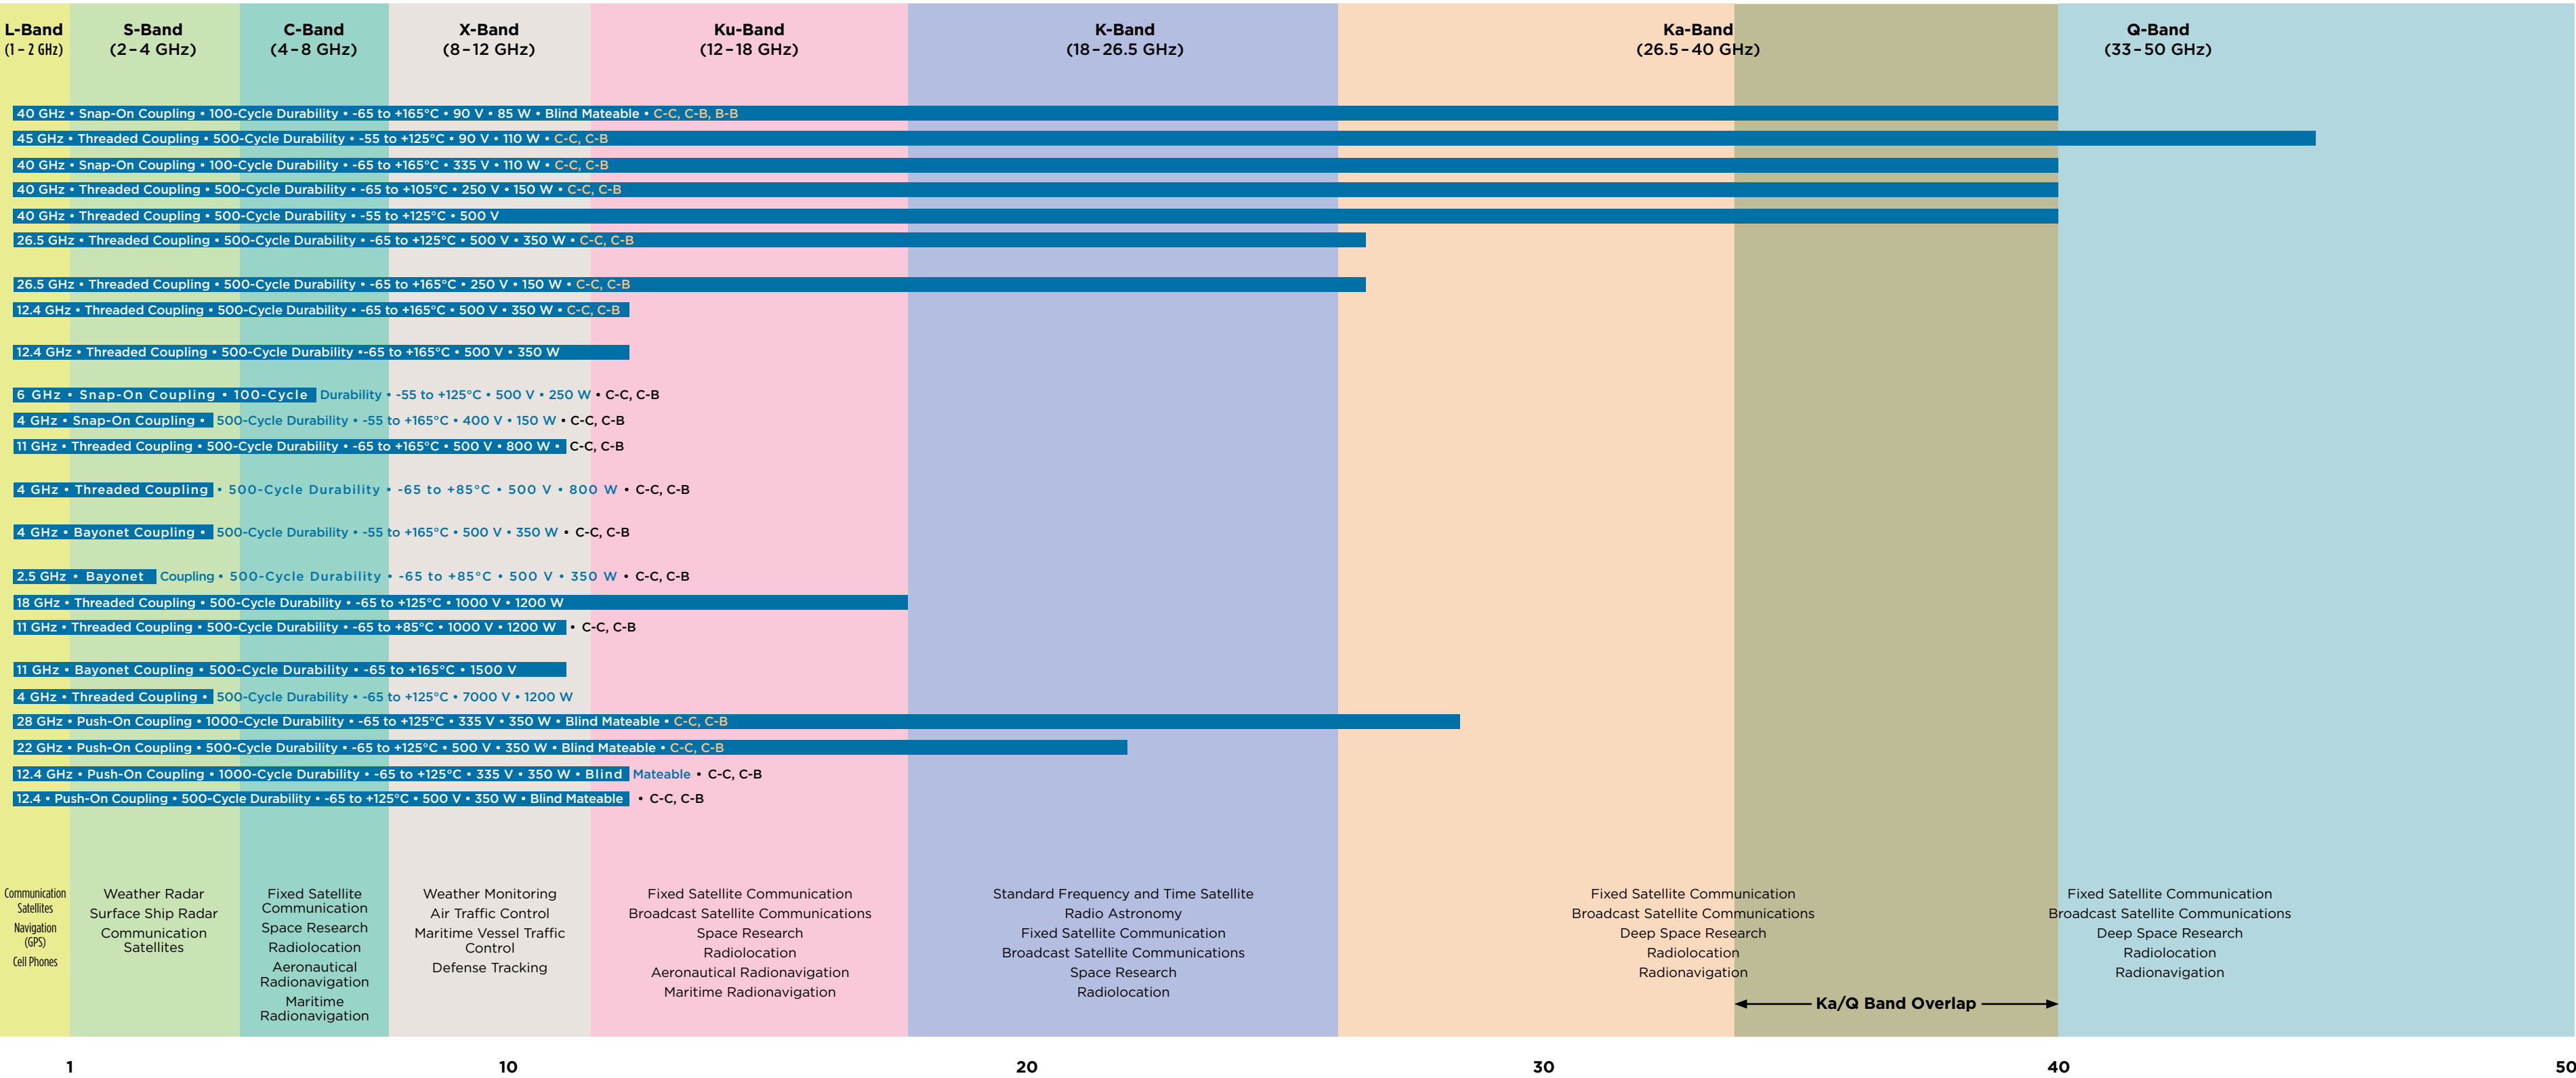

Ka/Q Band Overlap